


Slip Modified Treated Polypropylene Layer

Polypropylene Core Layer

Slip Modified Polypropylene Layer

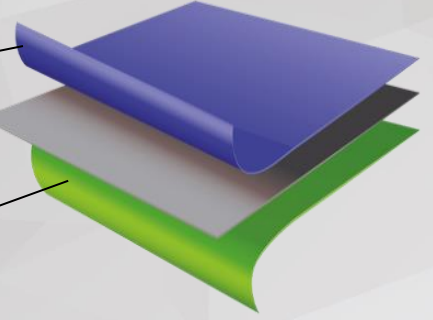

SUPLAIN

1011 MK

Description

SUPLAIN 1011 MK is a transparent biaxially oriented polypropylene film formulated with very low and stable slip property. No heat seal property. One side treated.

Single ply and/or outer web of lamination use for all kinds of packaging machines where low and stable COF is required with high speed applications. Specially recommended for bag making applications where excellent film/film COF value is required.

Properties

- Low and stable slip
- No chemical additive blooming effect
- High gloss and clarity
- Low haze
- Excellent adhesion to inks, coatings and adhesives
- Excellent resistance to chemicals, greases and oils
- Good moisture barrier
- Excellent machinability

Technical Features

PROPERTIES	TEST METHOD	UNITS		1011 MK
THICKNESS	ASTM F2251	micron		28
		Gauge		112
YIELD	ASTM D4321	m ² /kg		39,2
		in ² /Lbs		27.600
UNIT WEIGHT	ASTM D4321	g/m ²		25,5
HAZE	ASTM D1003	%		1,5
GLOSS (45 °)	ASTM D2457	%		95
TENSILE STRENGTH AT BREAK	ASTM D882	MD	N/mm ²	150
			lb/in ²	21.800
		TD	N/mm ²	280
			lb/in ²	40.600
ELONGATION AT BREAK	ASTM D882	MD	%	190
		TD		70
THERMAL SHRINKAGE (120 °C, 5 min, air)	ASTM D1204	MD	%	3
		TD		1
COEFFICIENT (*) OF FRICTION	ASTM D1894	Film/Film		0,30
		Film/Metal		0,20
SURFACE TENSION	ASTM D2578	Dyne/cm	Treated Side	38
			Other Side	-

(*) Non-treated side

Regulatory Status

Our product complies with the applicable EC legislation on packaging involving direct contact with foods except metallized films. Full details are given on the Regulatory Compliance Certificate and can be found on our web site.

The information contained in this data sheet is true and accurate according to current state of our knowledge and intended to give general information on our products and their applications. Above values are to be considered as guidelines and not as product specifications. Since the actual conditions of use are beyond our control, users are advised to make their own tests at their specific conditions of laboratory and/or actual use. We suggest our customers to determine final suitability for their specific end uses.

Also be advised that information on this data sheet shall not be construed as an inducement or recommendation to use any process or to manufacture or use any product in conflict with existing, pending or future patents.

For related spec sheet with tolerance values, please contact our sales departments